

$f_c: 800/4000\text{Hz}$

R_3	Motstand	1ohm 5W	17-31(23-26)	2,2ohm 5W
R_2	Motstand	8ohm 5W	14-28(18-24)	8ohm 5W
R_1	Motstand	1ohm 5W	22-34(25-30)	2,2ohm 5W
C_2	Kondensator	8 μ F 50VDC	4-13	5 μ F 50VDC
C_1	Kondensator	24 μ F 50VDC	1-3	16 μ F 50VDC
L_3	Spole	D0231 0,48mH	35-42	D0229 0,65mH
L_2	Spole	D0221 0,22mH	12-16	D0221 0,22mH
L_1	Spole	D0225SE 1,5mH	36-37	D0223S 2,2mH
	Benevnelse	4ohm	KOPLING	8ohm


Dato	Sign.
Endringer	

Tegnet	770909	<i>Kligger</i>
Kontr.	770926	K.E.O.



FABRIKKER A.S.
MOSS

Målestokk	Delefilter 3-veis 4 og 8 ohm (NB! Ikke byggesett 303/303R)	D036 P
1:1		Erstatning for:
		Erstattet av:

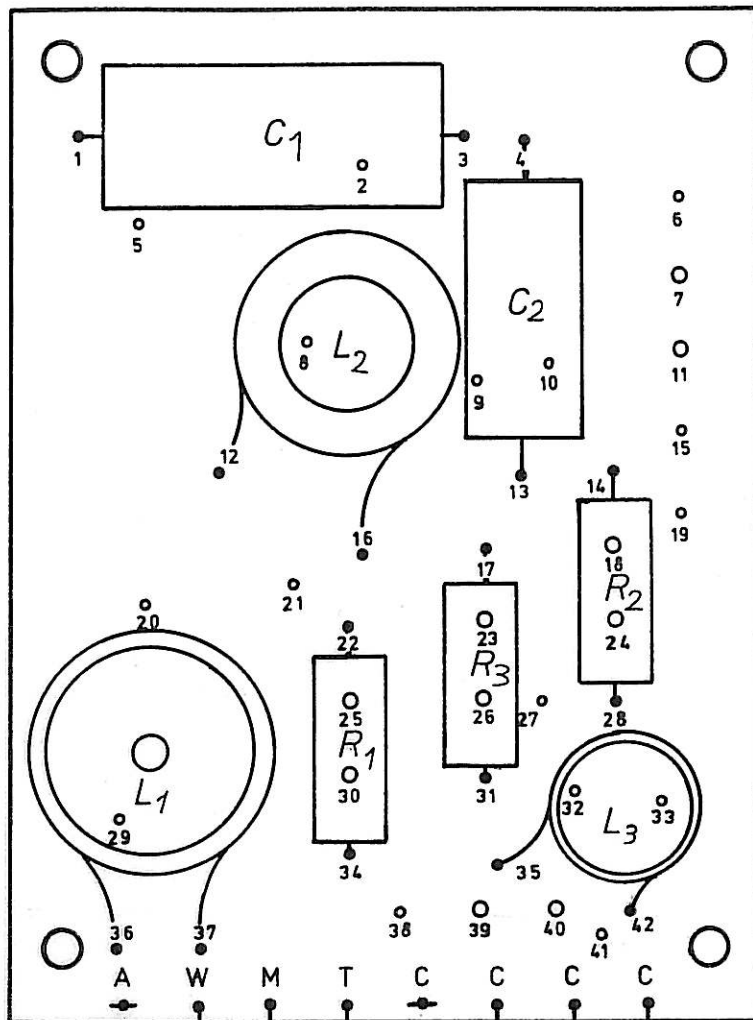

Loddespyd 6226

440mm rødm/stor flatstift 5382

540mm brun m/liten flatstift 5418

540mm hvit m/liten flatstift 5388

Loddespyd 6226

440mm sort m/stor flatstift 5383

540mm gul m/liten flatstift 5417

540mm blå m/liten flatstift 5389